

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60114689

Model :

DRENAG 300 MA 230/50 10MT H07RNF SCHU

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 50 °C

Max. Ambient temperature : 40 °C

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body Stainless Steel (AISI 304)

Support Stainless Steel (AISI 304)

Impeller Stainless Steel (AISI 304)


Mechanical seal pump side _Silicon carbide/Alumina

Mechanical seal motor side _Ring form

Shaft AISI 416

_O ring NBR

Curve tolerance according to ISO 9906

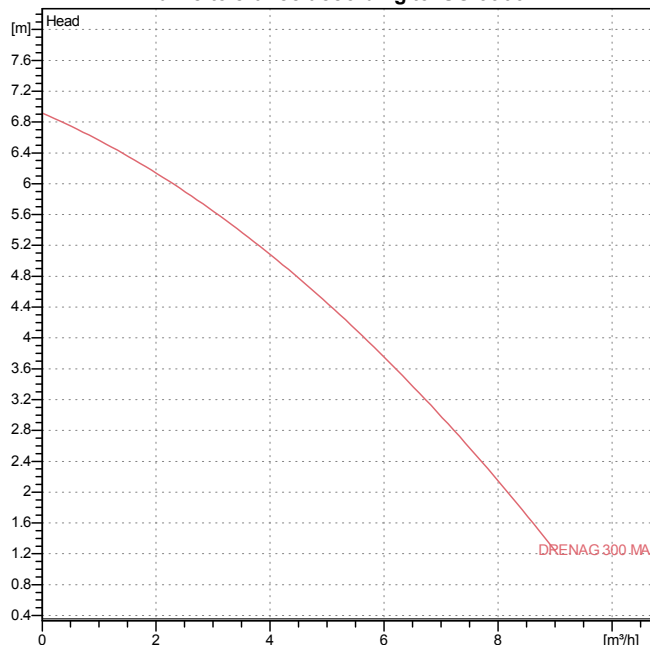

Motor data

Weight : 5.5 kg

Motor brand : DAB

Nominal power P2 : 0.25 kW

Rated voltage : 1~ 220 - 230 V

50 Hz

Nominal current : 1.8 A

Number of poles : 2

Rated speed : 2800 rpm

Degree of protection : IP 68

Dimensions in mm

A	1 " 1/4				
B	154				
C	43				
D	234				
E	213.5				
F	35				
G	132				

Pump connection

Suction side : /
Discharge side : 1 " 1/4 / --


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DRENAG 300 MA 230/50 10MT H07RNF SCHU

Curve tolerance according to ISO 9906

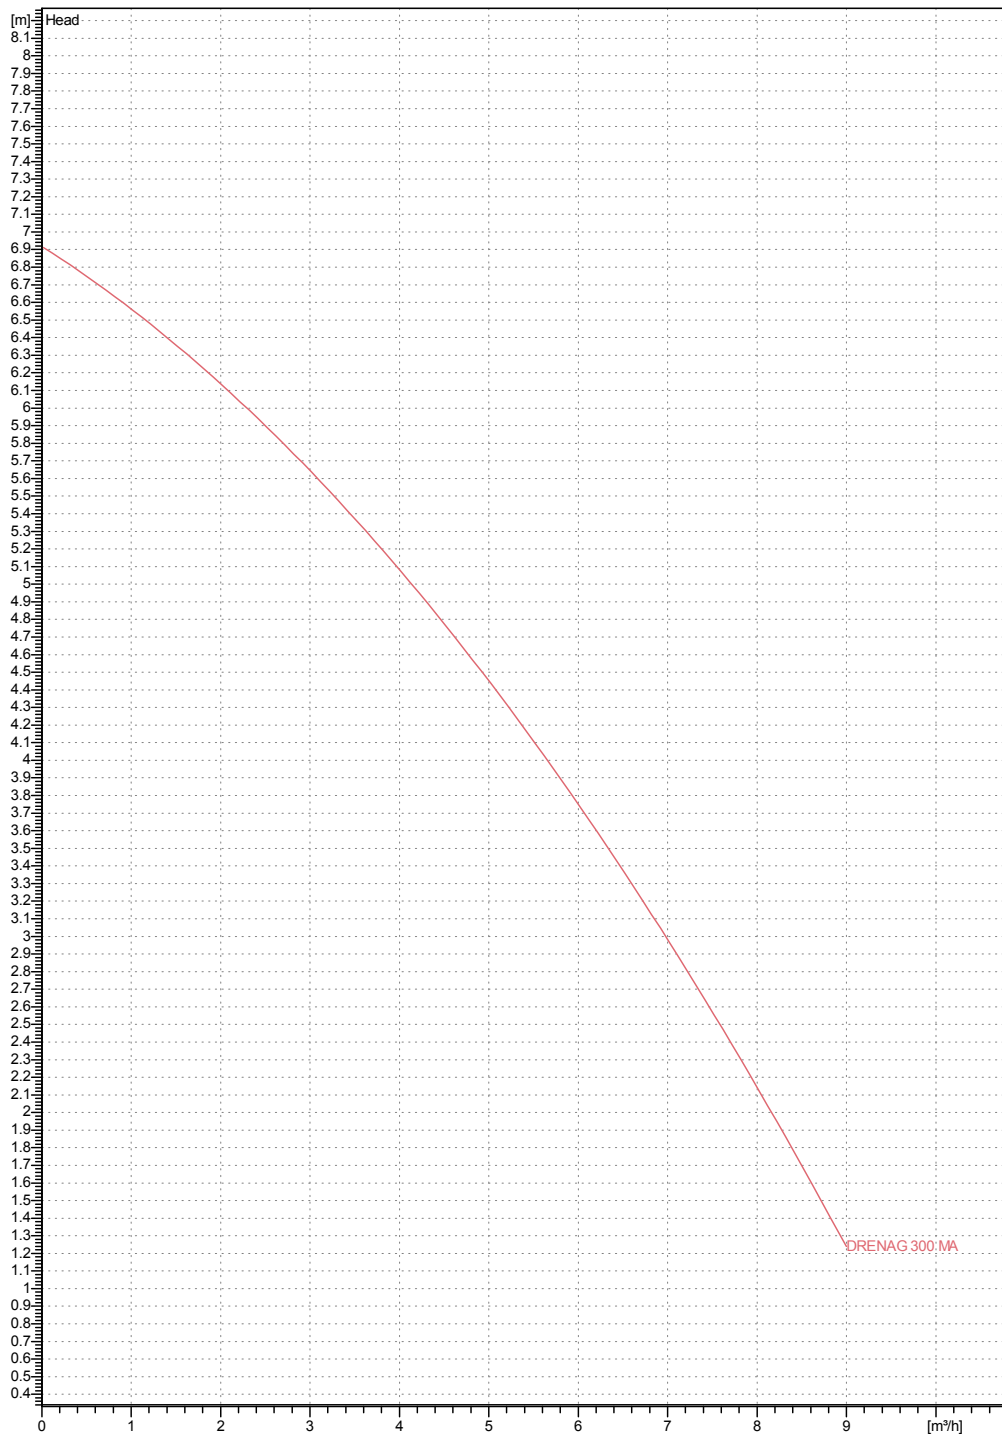

Hydraulic data (duty point)

Suction side :	Discharge side : 1 " 1/4 --	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DRENAG 300 MA 230/50 10MT H07RNF SCHU

Dimensions in mm

Pump connection

1	A	1 " 1/4
2	B	154
3	C	43
4	D	234
5	E	213.5
6	F	35
7	G	132

Suction

Discharge
1 " 1/4
—

Project

Project ID

Created by

Created on

24/03/2016