



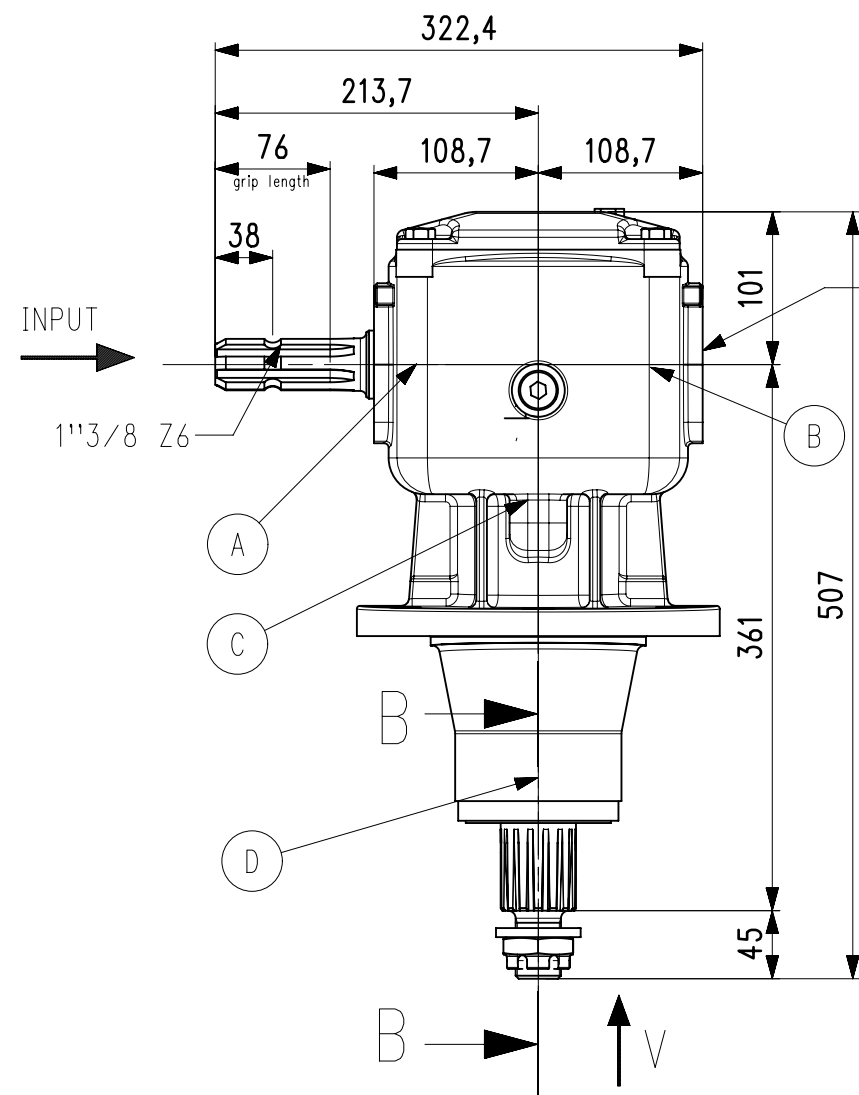


1/2" GAS OIL FILLER PLUG
No.4-M8
Thread depth 12 min
uniform spaced


No.4-M8
Thread depth 12 min
uniform spaced

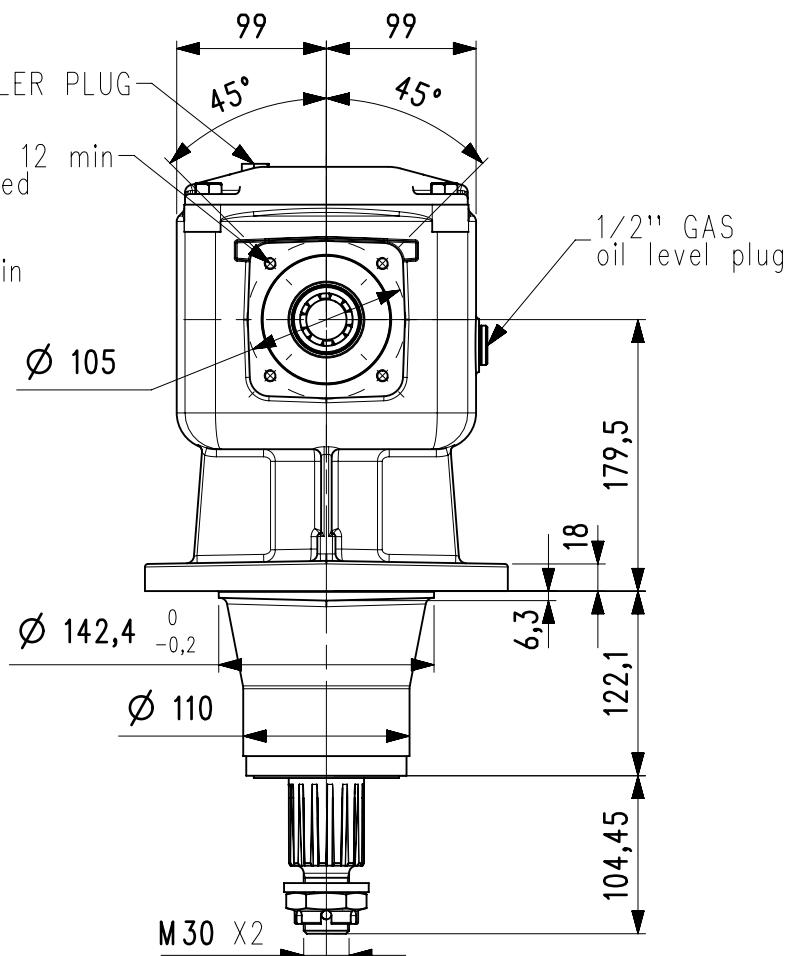

VISTA / VIEW A

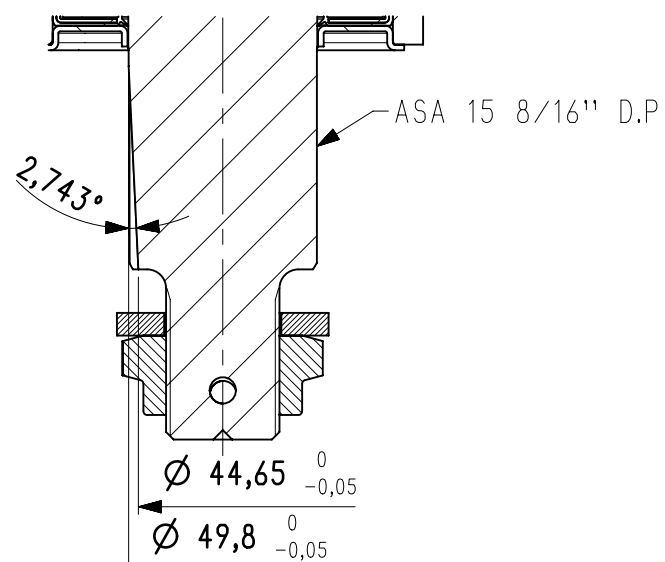

SEZ. / SECT. B-B

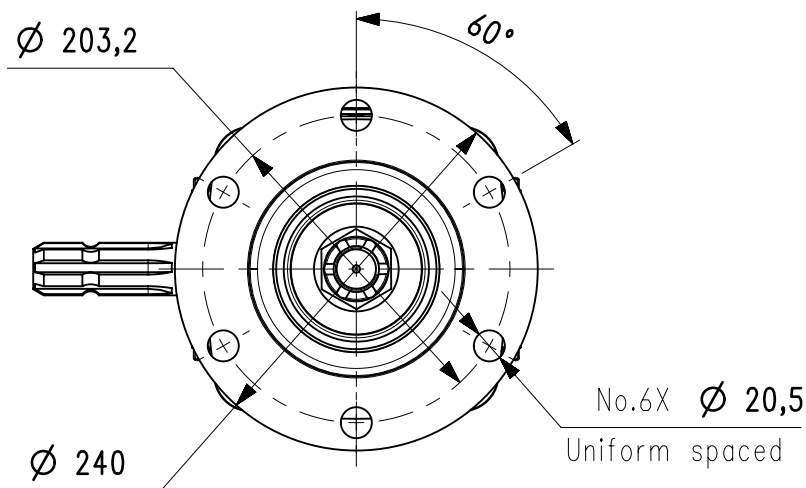

VIEW FROM V

CUSTOMER

CUSTOMER SIGNATURE
FOR APPROVAL

DATE

ASSEMBLY DIMENSIONS


0.286.7100.00
1/2" GAS breather
shipped separately

U0.100.7001.00
Bushing
shipped separately

8.4.7.00146
cotter pin
shipped separately

57 (output shaft diameter)
86 (output shaft diameter)

S.d.M.
10 21309

Rapporto Ratio 1:1.83 Verhältnis Rapport			Giri in entrata g/min. Input speed r.p.m. 540 Eingangsdrehzahl u/min. Tours en entrée tr/min.			Potenza in entrata 75 HP Input power 55.1 kW Eingangsleistung Puissance en entrée			Coppia in uscita Output torque moment 51.7 da Nm Ausgangsdrehmoment Couple en sortie						Code 9.227.804.10			Customer Ref.			 comer industries gearboxes		
Lubrificazione Oil Grease Lubrificante ☒ ☐ Lubricant Recommended Quantity Schmierstoff Litres ☐ Lubrifiant kg. ☐ Type SAE 90EP			Cuscinetti Bearings Lager Roulements			Peso - Weight- Gewicht - Poids 37 kg.			Tappo sfiato - Breather plug Entlüftungsstopfen-Bouchon ventilation						Designation LF-227 J			Date 12/Apr/2017					
						☒  Denti diritti Straight Gerade Droite			☐  Denti elicoidali Helicoidal Schraubenfoermig Helicoidale			☐  Tappo carico - filler plug Fullstopfen - Bouchon remplissage			COMER INDUSTRIES reserves the right to make any change to this product without prior public acknowledgement			COMER INDUSTRIES S.p.A. 42046 Villanova di Reggiolo (R.E.) Italia Tel. 0522\974111 (9 Linee) Telefax 0522\973249					
						☐  Tappo livello - Level plug Standsschraube - Bouchon niveau			☐  Tappo scarico - Drain plug Ablasssraube - Bouchon vidange			☒  1 : X									☐  1 : 1		