

Non è permesso copiare, a fini di riproduzione, questo documento, né utilizzare il contenuto a renderlo comunque noto a terzi.
Further Technical Data: 925 392 051 0
Doc. Code: 035 Sheet: 1 To: 5

Toute réimpression ou réimpression de ce document, toute exploitation ou communication de son contenu sans autorisation, sont formellement interdites.
Further Technical Data: 925 392 051 0
Doc. Code: 035 Sheet: 1 To: 5

SURFACE PROTECTION	
I	JED-739-3
II	JED-240-3
III	JED-259-1
IV	JED-240-5
V	JED-371-0
VI	RUBBER
VII	JED-240-1

- 1 OPEN BREATHER HOLE
OFFEN ATMUNGSBOHRUNG
VERT TRCU RENIFLEUR
APERTO FORO RESPIRATORE
- 2 TORQUE : 34 Nm max.
ANZUGSMOMENT :
COUPLE DE SERRAGE :
COPPIA DI SERRAGGIE :
- 3 DEFLECTION : AT STROKE
AUSLENKUNG : BEI HUB
DEFLEXION : A COURSE
EEVIAZION : A CORSA

- 4 TORQUE : 80±10 Nm .
ANZUGSMOMENT :
COUPLE DE SERRAGE :
COPPIA DI SERRAGGIE :
- 5 TO BE INSTALLED WITH THE BREATHER HOLE OPEN AT BOTTOM MOST POSITION
IM EINBAUZUSTAND UNTERE A ATMUNGSBOHRUNG OFFEN
A MONTER AVEC LE RENIFLARD INFÉRIEUR OUVERT
INSTALLAZIONE CON IL FORO DI SFIAITOINFERIORE APERTO
- 6 CONDITION AS SUPPLIED : SPRING BRAKE RELEASED
ANLIEFERUNGSZUSTAND : FEDERBREMSE GELOST
ETAT DE LIVRAISON : PUBLIC FREIN DE PRINTEMPS
STATO DI FORNITURA : FRENO A MOLLA RILASCIATO
- 7 TORQUE : max. 25 Nm
ANZUGSMOMENT :
COUPLE DE SERRAGE :
COPPIA DI SERRAGGIE :

- 8 ADMISSIBLE INSTALLATION POSITION
ZULAESSIGE EINBAULAGE
POSITION D'INSTALLATION ADMISE
POSIZIONE DI MONTAGGIO AMMESSA

- 9 RELEASED POSITION
LOESESTELLUNG
POSITION DE DESS ERRAGE
POSIZIONE DI RILASCIO
- 10 TORQUE : 210 ⁰/₋₃₀ Nm
ANZUGSMOMENT :
COUPLE DE SERRAGE :
COPPIA DI SERRAGGIE :
- 11 FIXTURE OF RELEASE BOLT
LOSESCHRAUBENHALTER
SUPPORT DE LA VIS DE
DESSERRAGE

MEDIUM : AIR
MEDIUM : LUFT
FLUIDE : AIR
FLUIDO : ARIA

NOMINAL DIAMETER :
NENNWEITE : MIN Ø9.0 mm
DIAMETRE NOMINAL :
DIAMETRO NOMINALE :

WIDTH ACROSS FLATS
SW SCHLUESSELWEITE
SURPLATS
LAGHEZZA IN CHIAVE

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH : -40°C...+80°C
BAMME D'APPLICATION TERMIQUE :
CAMPO DI APPLICAZIONE TERMICA :

PORT : SERVICE BRAKING SYSTEM, WORKING PRESSURE
ANSCHLUSS : 11 BETRIEBSBREMSEANLAGE, BETRIEBSDRUCK
ORIFICE : DISPOSITIF DE FREINAGE DE SERVICE, PRESSION D'UTILISATION
ORIFIZIO : DISPOSITIVO DI FRENATURA DI SERVIZIO, PRESSIONE DI ESERCIZIO




Pe max. = 10.2 bar (TEMPORARILY :
KURZZEITIG : Pe max. = 13 bar)
(DE COURTE DUREE :
(BREVE TEMPO SOLO:

PORT : SPRING BRAKE CYLINDER, WORKING PRESSURE
ANSCHLUSS : 12 FEDERSPEICHERZYLINDER, BETRIEBSDRUCK
ORIFICE : CYLINDRE A RESSORT, PRESSION D'UTILISTION
ORIFIZIO : CILINDRO A MOLLA, PRESSIONE DI ESERCIZIO

Pe max. = 8.5 bar (TEMPORARILY :
KURZZEITIG : Pe max. = 11 bar)
(DE COURTE DUREE :
(BREVE TEMPO SOLO:

11 STROKE :
HUB : 75 mm min.
COURSE :
CORSA :

12 STROKE :
HUB : 75 mm min.
COURSE :
CORSA :

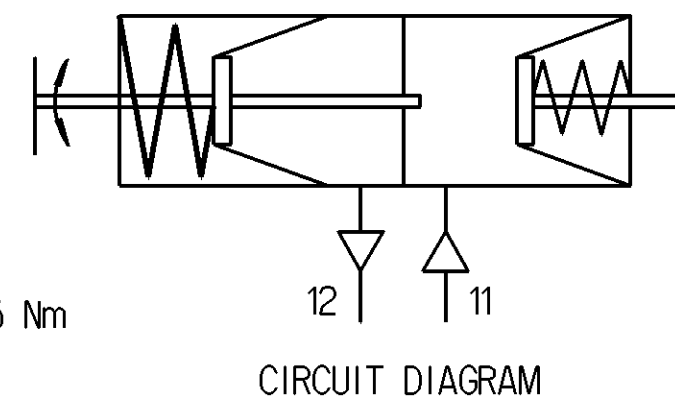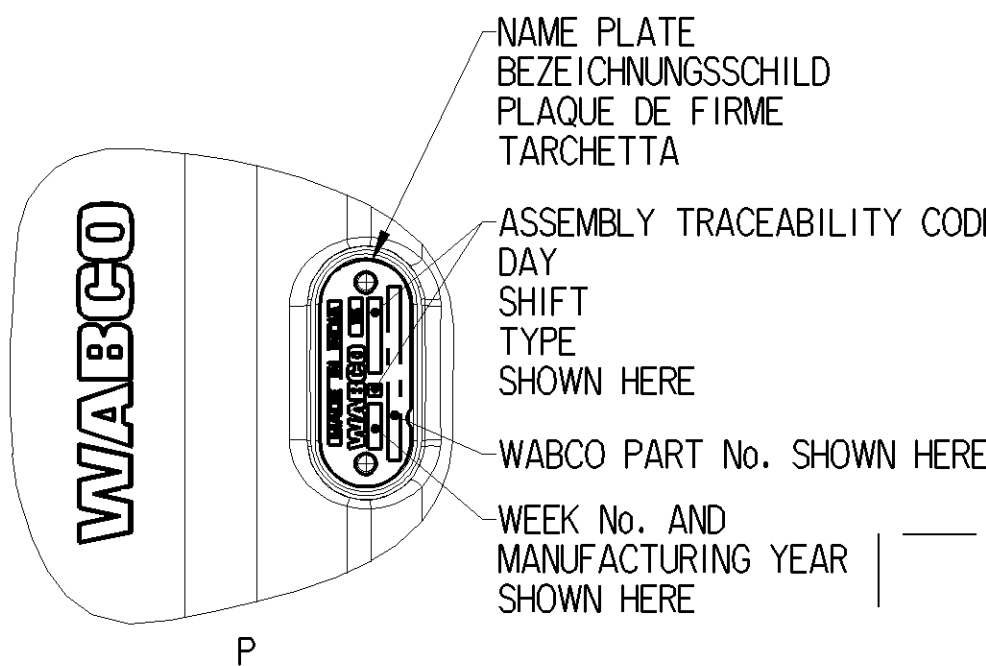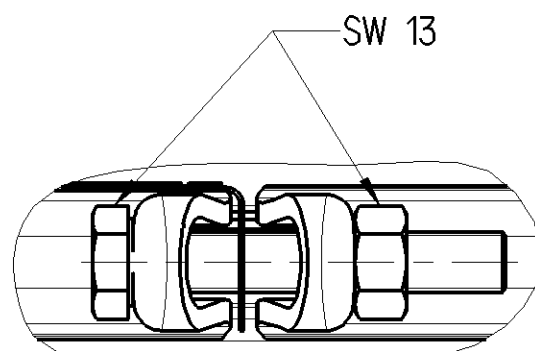

CIRCUIT DIAGRAM

General Specifications: JED-334-1, Size ISO 14405 LP				Copyright WABCO®	
Further Technical Data: 925 392 051 0				Date	Signature
Doc. Code: 035				Drawn	
General Tolerances JED-261				2018-07-09	Viswanathan M
Range of Nominal Dimensions (± mm)				Checked	Senthikumar
Class 1) ≤ 50 > 50 > 180 > 180 > 400 > 400				Expert	Senthikumar
Fine 0.5 1.0 1.5 2.0				Material No.	
Medium X 1.0 2.0 3.0 4.0 ±3°				925 375 110 0	
Coarse 2.0 3.5 5.0 6.5				Date of first issue: 2017-01-12	
Tapped Holes acc. JED-152				Doc. Code Language Sheet	
1) Tolerance Class Applied Crossmarked				005 ML 1/1	
				ECHO No. Revision Techn. Resp. Replacement for	
				177306 1 B 5420 925 375 100 0	

