

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60115704.

Model :

EUROCOVER

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

Requested data

Flow : 0.00 m³/h

Head : 0.00 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100.00 kPa




Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body	Technopolymer
Impeller	Technopolymer
OR ring	NBR Rubber
Motor top body	Stainless Steel AISI 304
Motor shaft	Stainless Steel AISI 316
Suction strainer	Technopolymer
Float	Technopolymer

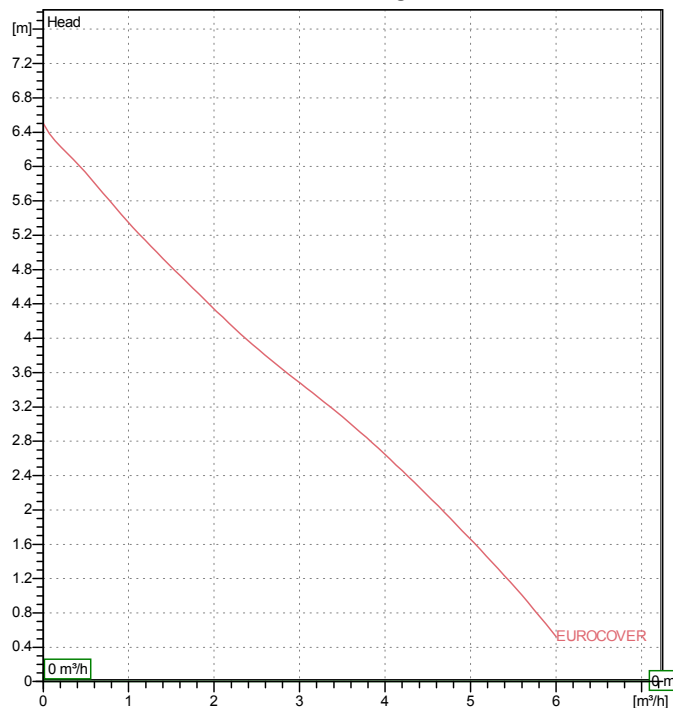Curve tolerance according to ISO 9906

Motor data
Weight : 4.6 kg

Motor brand : DAB

Nominal power P2 : 0.22 kW

Rated speed : 2800 rpm

Rated voltage : 1~ 220-240 V 50 Hz

Nominal current : 0 A

Degree of protection : IP 68

Dimensions in mm

--	--	--	--	--	--	--	--

Pump connection

Suction side : /

Discharge side : /


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

EUROCOVER

Curve tolerance according to ISO 9906

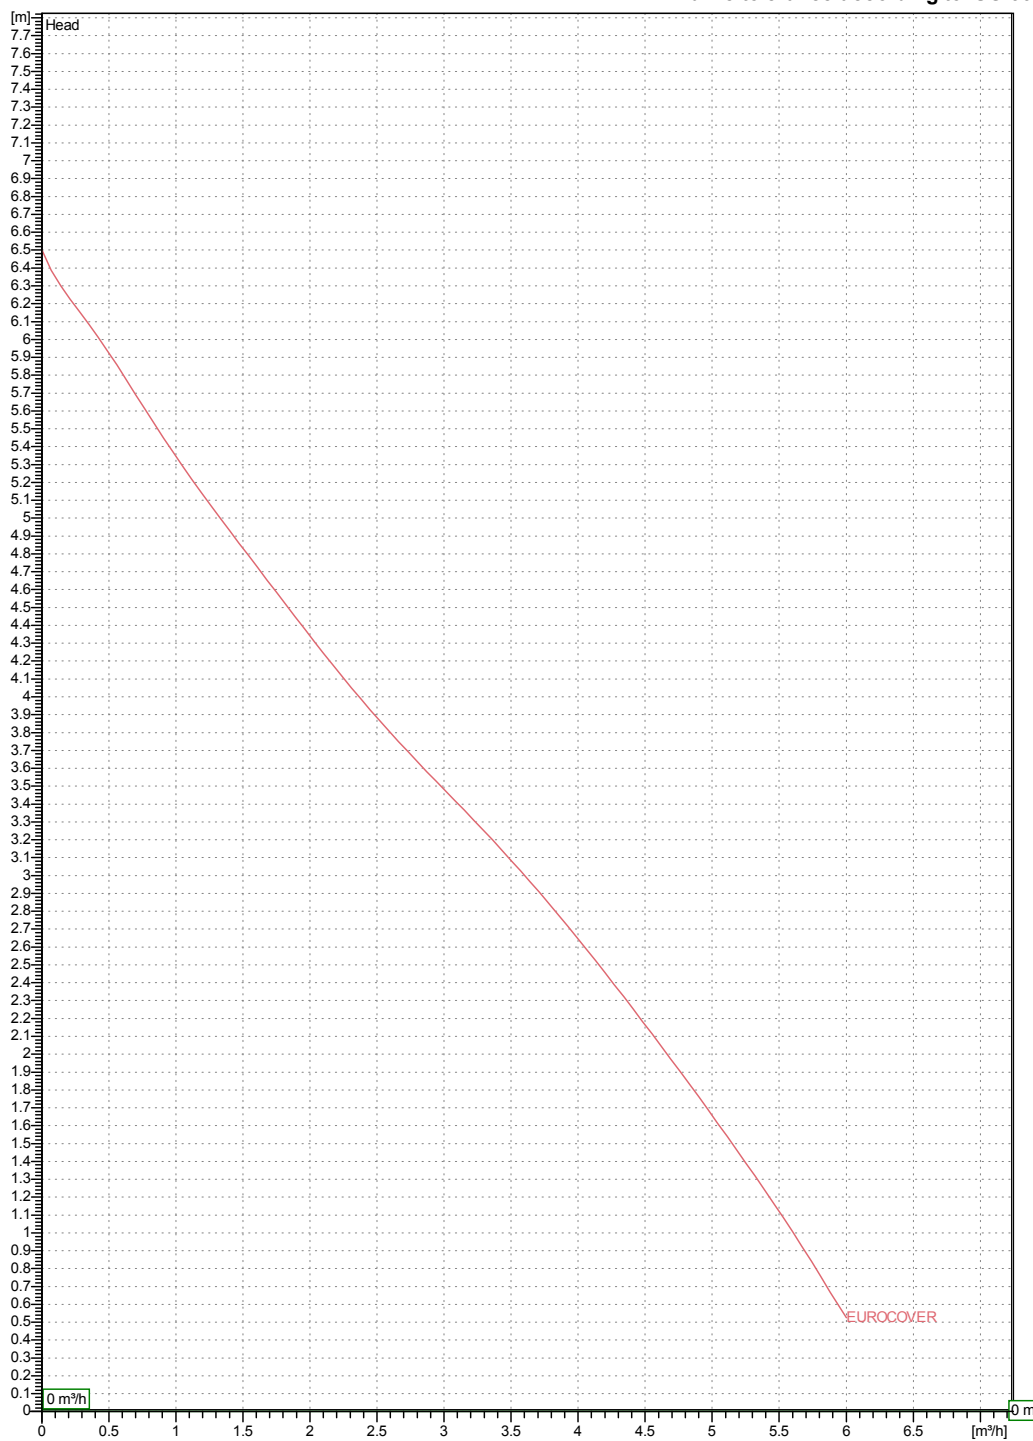

Hydraulic data (duty point)



Suction side :	Discharge side :	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

EUROCOVER

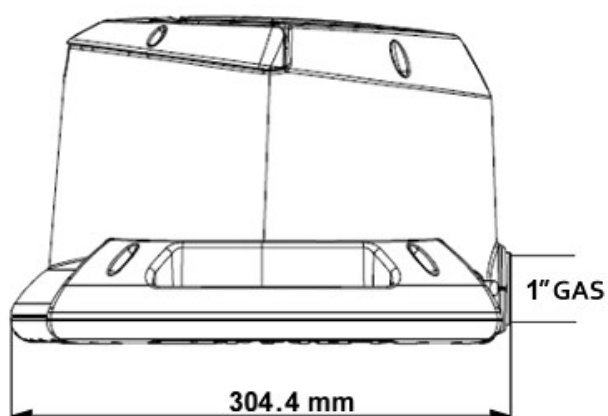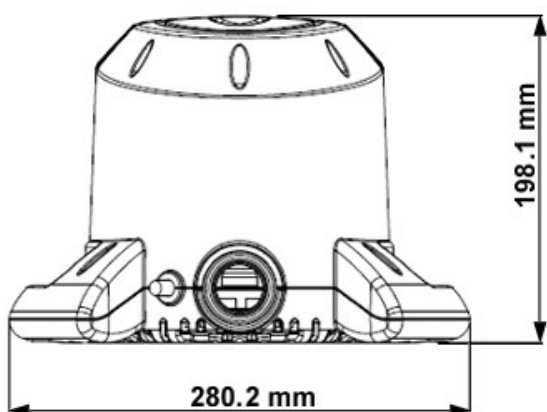

Dimensions in mm

Pump connection

Suction

Discharge

Project

Project ID

Created by

Created on

24/03/2016