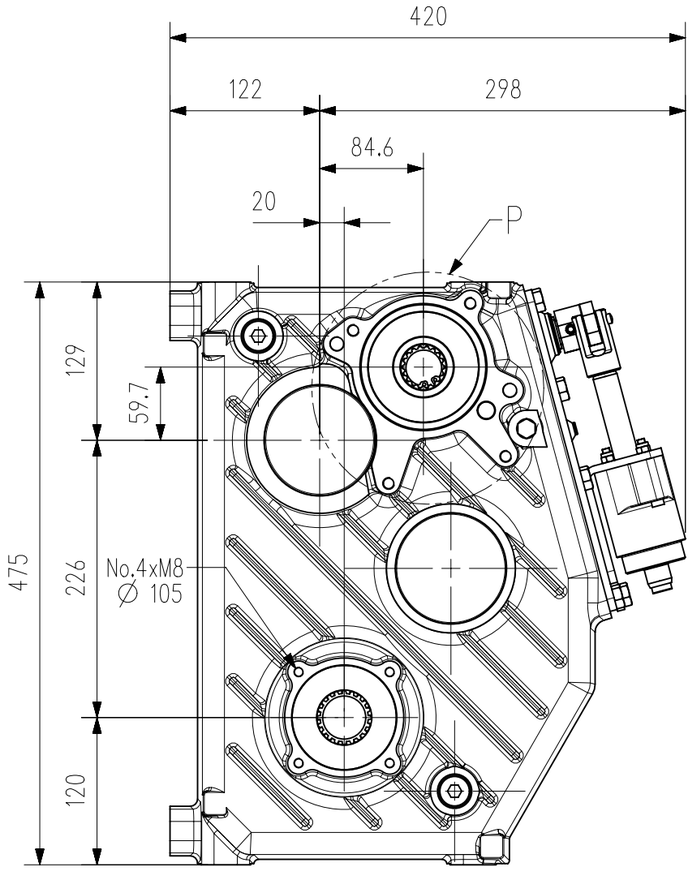

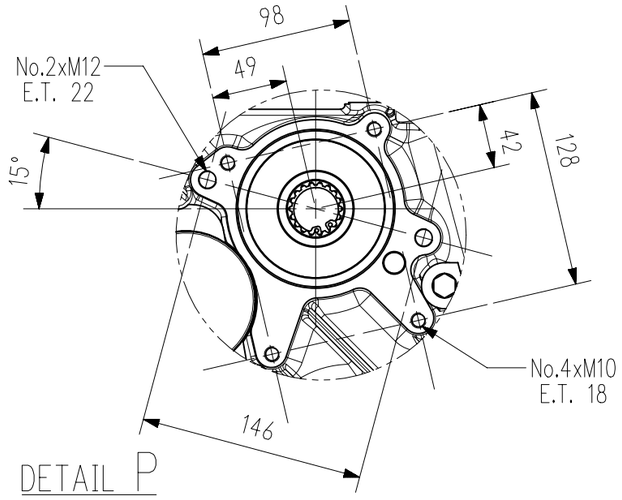

DETAIL P

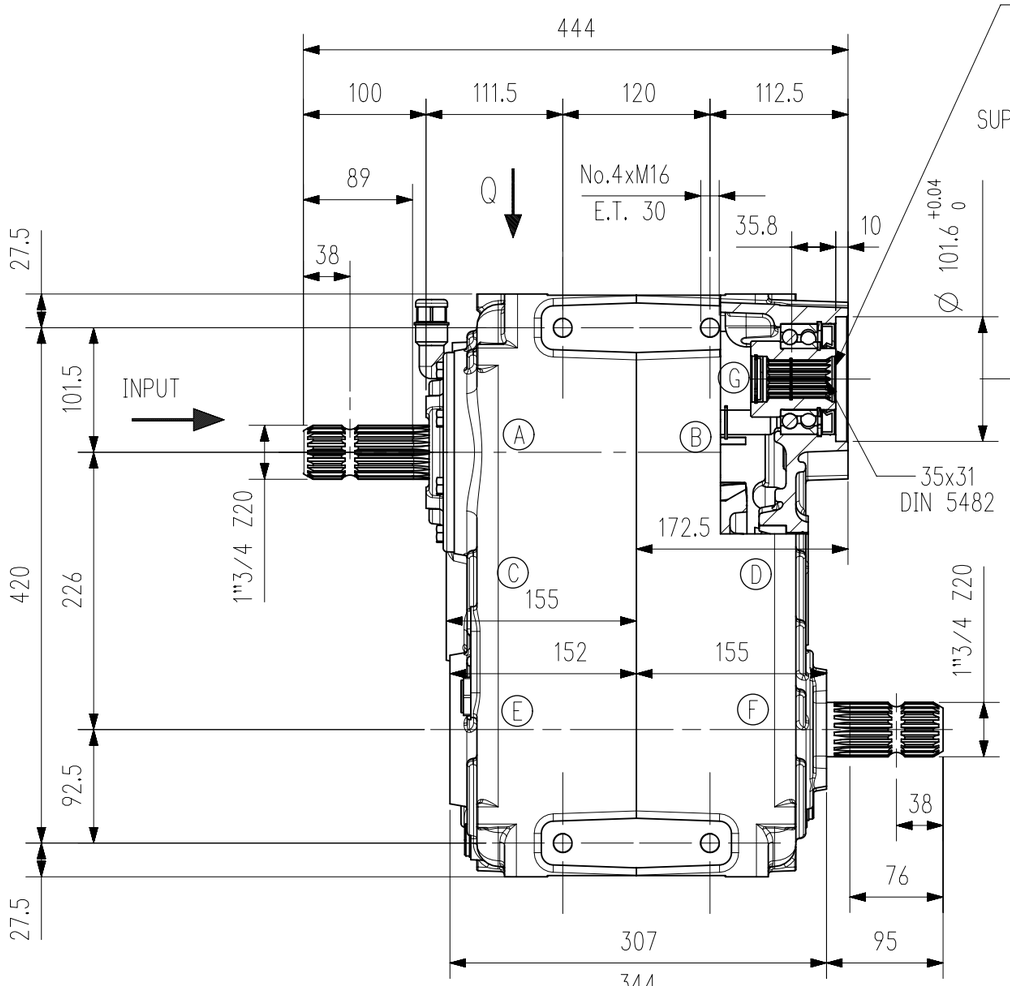

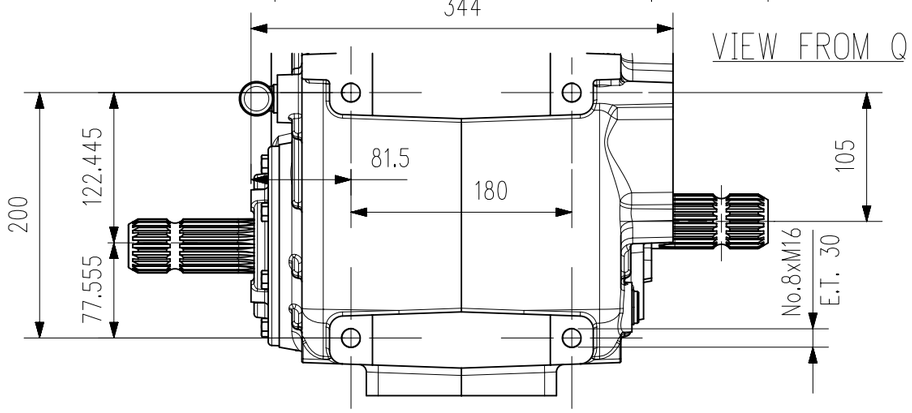

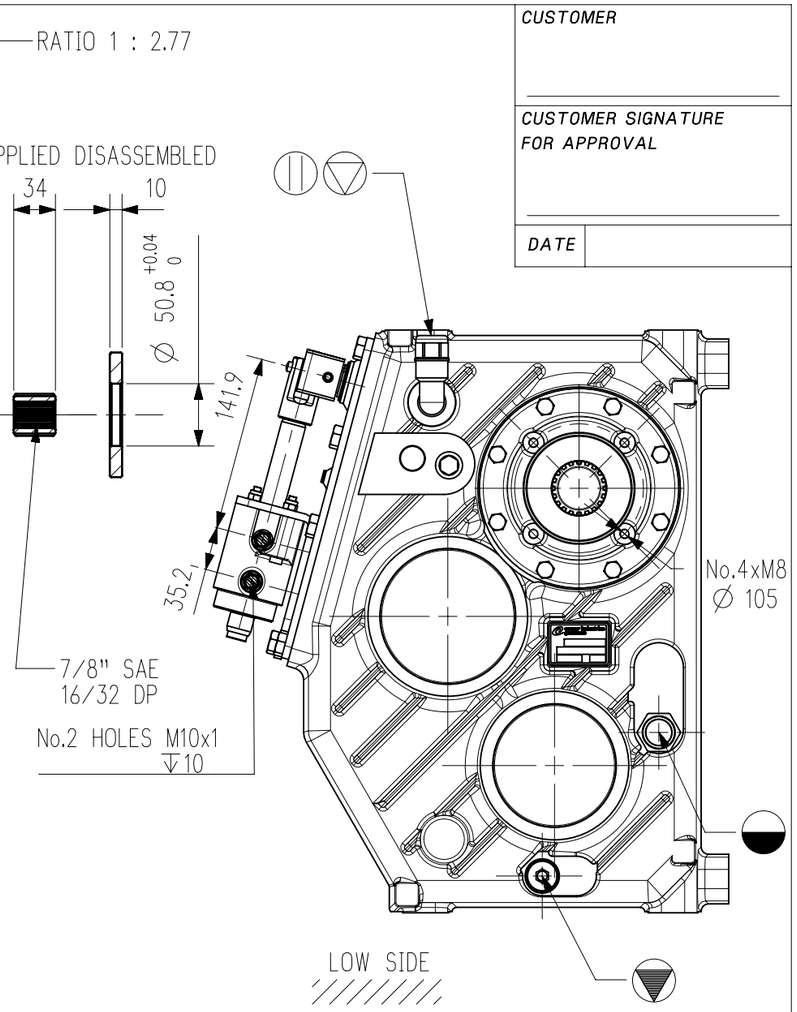

SHIFTING INSTRUCTIONS:

- THE GEAR SHIFTING MUST BE DONE WHEN THE PTO SHAFT IS COMPLETELY STOPPED.
- AFTER SHIFTING, SET THE ENGINE SPEED AT MINUMUM SPEED/RPM AND THEN ENGAGE THE PTO SHAFT.
- ACCELERATE PTO SHAFT AT NOMINAL SPEED.

CUSTOMER	
CUSTOMER SIGNATURE FOR APPROVAL	
DATE	

S.d.M. 71.21090

Rapporto Ratio Verhätnis Rapport	1 : 1 1.8 : 1	Giri in entrata g/min. Input speed r.p.m. Eingangsdrehzahl u/min. Tours en entreè tr/min.	540 1000	Potenza in entrata Input power Eingangsleistung Puissance en entrée	180 HP 245 Kw	Coppia in uscita Output torque moment Ausgangsdrehmoment Couple en sortie	--- da Nm

	Oil	Grease
Lubrificante Lubricant Schmierstoff Lubrifiant	☒	☐

Recommended Quantity: 7 Litres

Type: SAE 90 EP

Cuscinetti Bearings Lager Roulements	
A	32309
B	30309
C	30310
D	30309
E	30309
F	32310
G	3210
H	

Peso – Weight– Gewicht – Poids 117 Kg.

Denti diritti Straight Gerade Droite	Denti elicoidali Helicoidal Schraubenfoermig Helicoidale
☐	☒

Tappo sfiato – Breather plug Entluftüngsstopfen–Bouchon ventilation	☐
Tappo carico – filler plug Fullstopfen – Bouchon remplissage	☐
Tappo livello – Level plug Standschraube – Bouchon niveau	☐
Tappo scarico – Drain plug Ablasssraube – Bouchon vidange	☒

In.

1 : X	1 : 1	X : 1
☐	☐	☒

Code	Customer Ref.
9.613.000.70	---

Designation	Date	Company
A-613R	12-04-2017	---

comer industries gearboxes

COMER INDUSTRIES reserves the right to make any change to this product without prior public acknowledgement

COMER INDUSTRIES S.p.A. 42046 Villanova di Reggiolo (R.E.) Italia Tel. 0522\974111 (9 Linee) Telefax 0522\973249