

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60145192

Model :

EUROSWIM 75 T

Pump data

Pressure rating : 2,5 bar (250 kPa)
Min. fluid temperature : 0 °C
Max. fluid temperature : 60 °C
Max. Ambient temperature : 50 °C

Requested data



Flow : 0.00 m³/h
Head : 0.00 m
Fluid : Water, pure
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 100.00 kPa

Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body Reinforced technopoly mer
Impeller Reinforced technopoly mer
Diffuser Reinforced technopoly mer
Filter Technopoly mer
Mechanical seal Carbon/Alumina/NBR/AISI316
Filter cover Poly carbonate
O-ring NBR

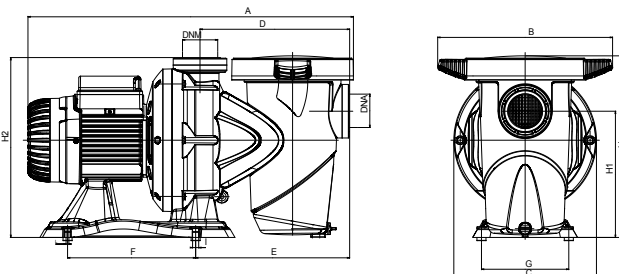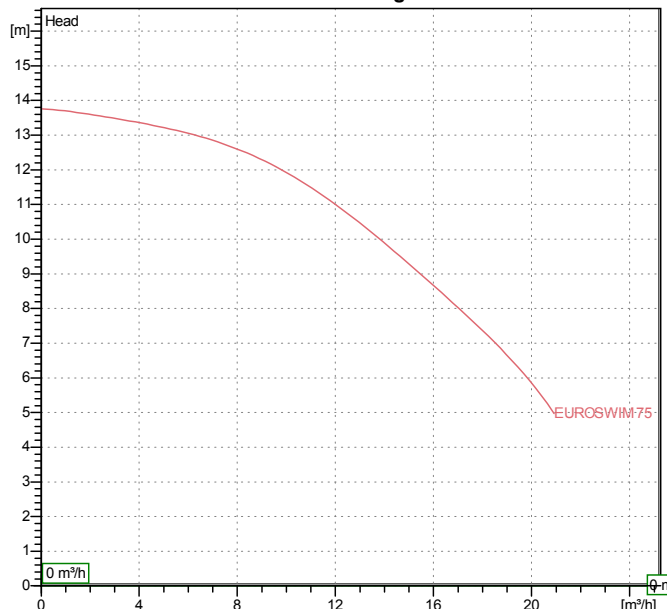Curve tolerance according to ISO 9906

Weight : 12.1 kg

Motor data

Motor brand : DAB
Nominal power P2 : 0.5 kW
Rated speed : 2900 rpm
Rated voltage : 3~ 230 V / 400 V 50 Hz
Nominal current : 3.5 / 2 A
Degree of protection : IP 55

Dimensions in mm

A	559	I	11
B	300	L	6.5
C	245		
D	257		
DNA	G2"		
DNM	G2"		
E	265		
F	220		
G	150		
H	317		
H1	222		
H2	314		

Pump connection

Suction side : 2 " G / 2,5 bar (250 kPa)
Discharge side : 2 " G / 2,5 bar (250 kPa)


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

EUROSWM 75 T

Curve tolerance according to ISO 9906

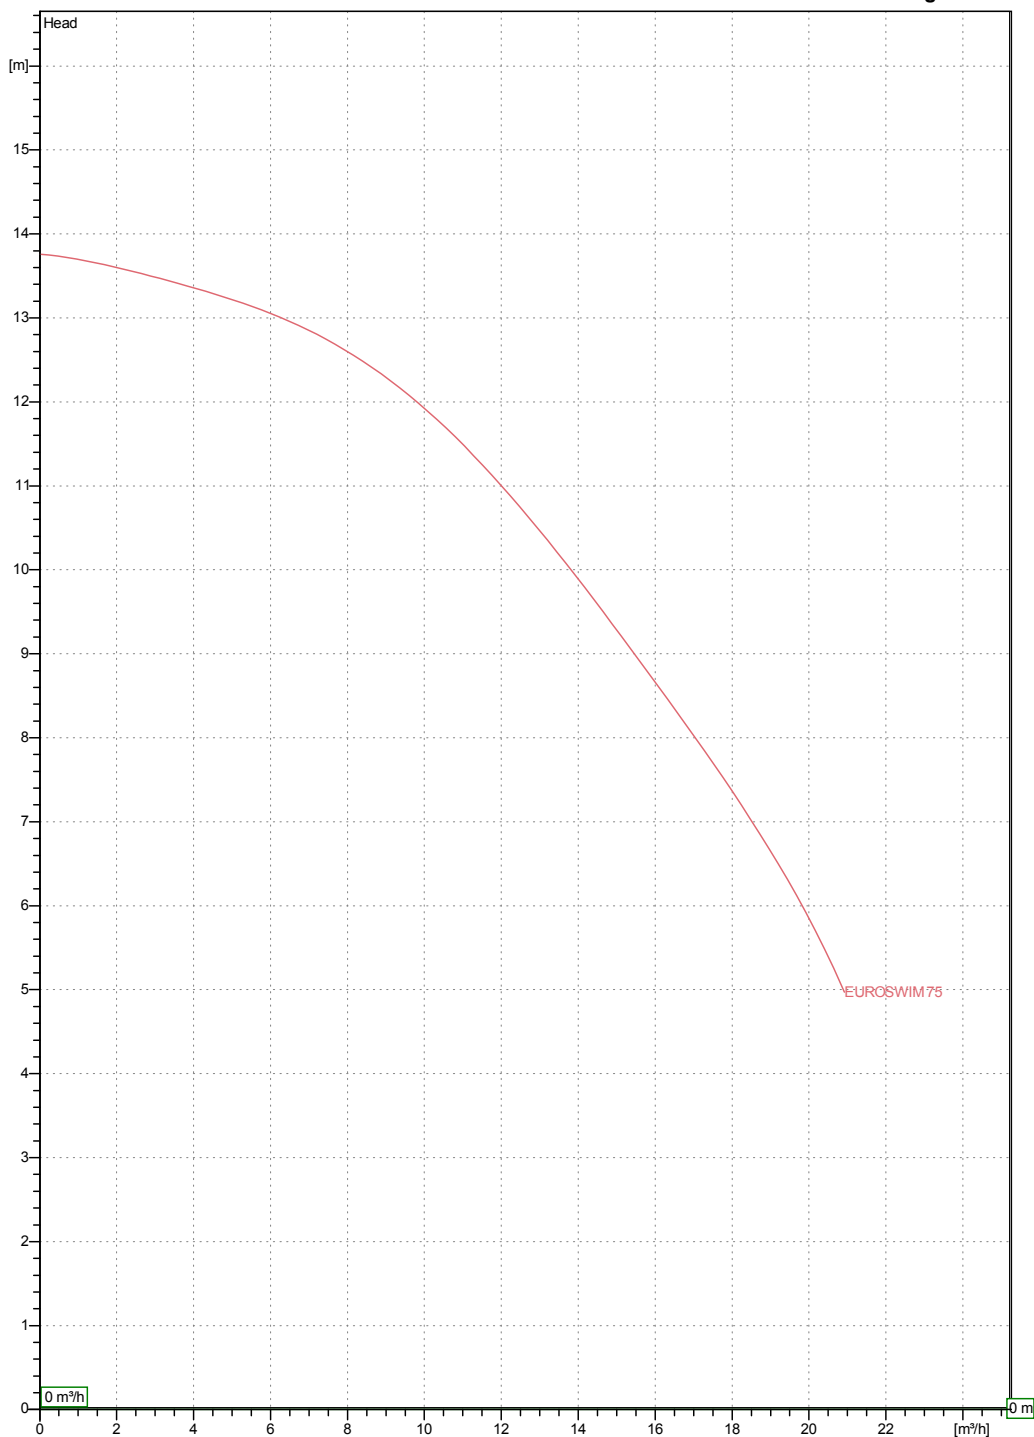

Hydraulic data (duty point)



Suction side : 2 " G 2,5 bar (250 kPa)	Discharge side : 2 " G 2,5 bar (250 kPa)	Flow : 0 m³/h	Head : 0 m	Rated speed : 2900 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

EUROSWIM 75 T

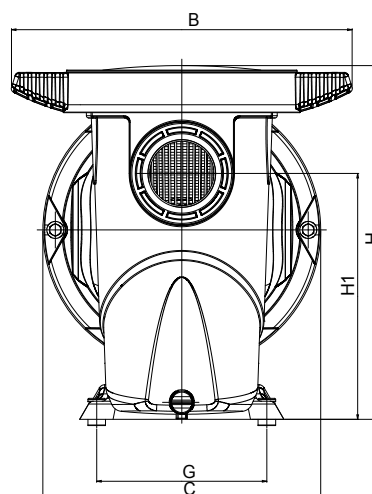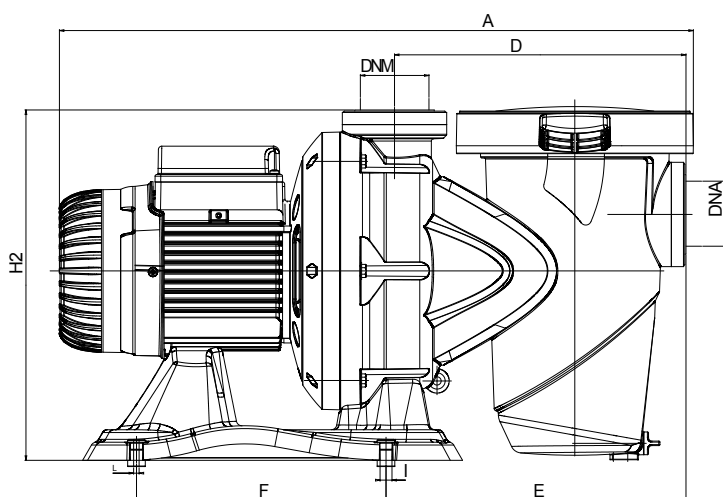

Dimensions in mm

1	A	559	H1	222		
2	B	300	H2	314		
3	C	245	I	11		
4	D	257	L	6.5		
5	DNA	G2"				
6	DNM	G2"				
7	E	265				
8	F	220				
9	G	150				
10	H	317				

Pump connection

Suction
2 " G
2,5 bar (250 kPa)

Discharge
2 " G
2,5 bar (250 kPa)

Project

Project ID

Created by

Created on

24/03/2016