



Loop Size available

No.	Gauge	Loops											Reels	
72EXL	.050"					68	70	72					25 ft	100 ft
73EXL	.058"	56	60	64		68		72	76	84	92			
75EXL	.063"	56	60		66			72	76	84		98	104	114

Filing

Oregon professional file part number 70502. 25° top plate.
Professional user tuning/filing; Depth gauge to top plate is optimised from factory at 0.025", no need to file down out-of-box. Apply a down angle approximately 10° when filing.

Oregon Recommended Bars

NEW VersaCut™

Large radius nose. Versatile, durable, light.
15", 16", 17", 18", 20"



NEW PowerCut™

Replaceable sprocket nose bar. Tough, heavy duty use.
13", 15", 16", 17", 18", 20", 22", 24", 26", 28", 30", 32", 36", 42"



OregonProducts.com

OREGON®

*"This is
the next
step better.."*

Alex Bildeaux
Bildeaux Services, Minnesota, USA

Your Oregon dealer:

Oregon®, LubriTec™, and PowerCut™ are trademarks of Blount, Inc.

OREGON®

Keep Your Edge



- ✓ Faster
- ✓ Less effort
- ✓ Powerful

PowerCut™ 70-Series EXL

The Evolution of 3/8" Professional Saw Chain

Designed to require less force from the operator to get through the cut quickly.

OregonProducts.com

BLOUNT EUROPE SA- ALL RIGHTS RESERVED - 2018 - PRINTED IN EU - EN - 4429/18

OREGON®

Optimized Cutter Design

- Reshaped cutter powers through timber with speed, efficiency, and precision
- Reduces the force applied by the operator by up to 14%*
- Engineered to utilize the power of today's high output professional saw

The World's Sharpest, Cleanest Cutting Edge from Oregon's Proprietary Grind Process

- Superior edge sharpness
- Improved consistency
- Expanded design capabilities

A Sharper, Reshaped Cutter Provides Faster Speed and Requires Less Effort in the Cut

More Bite and Faster Cutting with a Re-Tuned Depth Gauge Height



✓ Faster

Sharper reshaped cutter is optimized for maximum performance right out of the box

✓ Less effort

Increased self feeding to reduce the amount of your effort in the cut


✓ Powerful

Efficiently transfers horsepower into the cut maximizing the saw's power



- + **NEW** Reshaped Full-Chisel cutters.
- + **NEW** Cleaner, Sharper, more durable cutting edge
- + **NEW** Multi-axis grind technology
- + **NEW** LubriTec™ oiling system. Less friction, longer life
- + **NEW** Optimised ramped depth gauge design. Bumperless, low kickback, low vibration.
- + **NEW** Easier maintenance features Gold Loop Start/stop Indicator, enhanced filing indicators (side/top/end-of-life) and easier to file geometry.
- + **NEW** Dry-touch oiled from factory. Less mess.
- + **NEW** EXJ skip sequence available (special order)

72, 73, 75 EXL

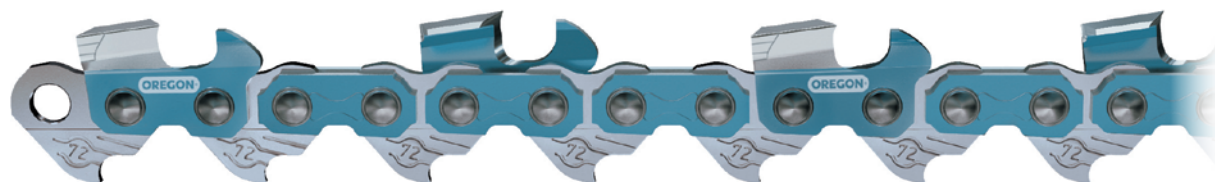

3/8" Saw Size

50–100 cc

Bar Lengths


16–36" (40–90 cm)



Chisel



Kickback Safety



No. Gauge Standard Sequence

72EXL .050"

73EXL .058"

75EXL .063"



OREGON
Part Numbering
System:

Past P/N
LGX

72LGX060E → 72EXL060E
73LGX060E → 73EXL060E
75LGX072E → 75EXL072E

New P/N
EXL