
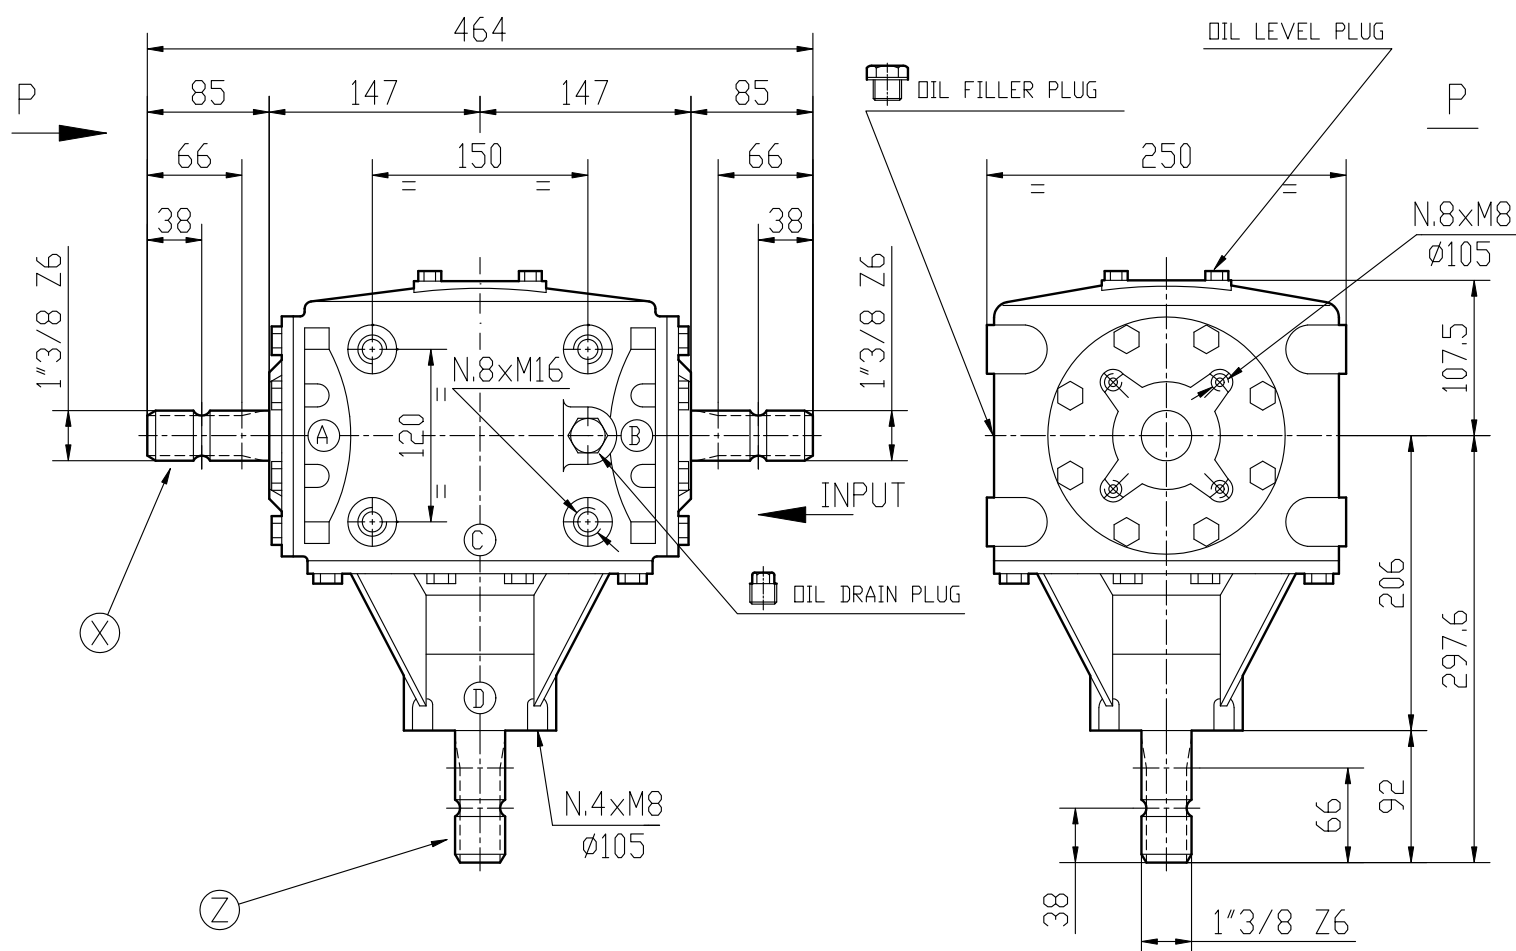




S.d.M.
21.5470

REDUCTION GEAR UNIT

Ratio i		Rated input r.p.m.		Rated input power HP kW		Rated output torque da Nm		Weight Kg		Oil ☒ Grease ☐ Type Quantity Lt.								
3 : 1		540		53 39		200.5		40		SAE.90EP 3.3								
Gear Arrangement		Bevel couplings						Cylindrical couplings						Bearings				
 In.		Helicoidal	Straight	Teeth number				Module	Helicoidal	Straight	Teeth number				Module	A	30307	
				Z 1	Z 2	Z 3	Z 4	M.			Z 1	Z 2	Z 3	Z 4	M.	B	30208	
			*	12	36			5.6									C	30210
																	D	30210
																	E	
Components material																F		
Casing		Shaft X		Shaft Z		Bevel gear		Spur gear		G								
GS 400/12 UNI 4544_74		18 NiCrMo5		18 NiCrMo5		Z12=18 NiCrMo5 Z36=16 CrNi4				H								

COMER INDUSTRIES reserves the right to make any change to this product without prior public acknowledgement

COMER INDUSTRIES S.p.A. 42046 Villanova di Reggiolo (R.E.) Italia Tel. 0522\974111 (9 Linee) Telefax 0522\973249