




Company	Re.	Designation	L-25A
	Date	Code No	124.019.2 0/a

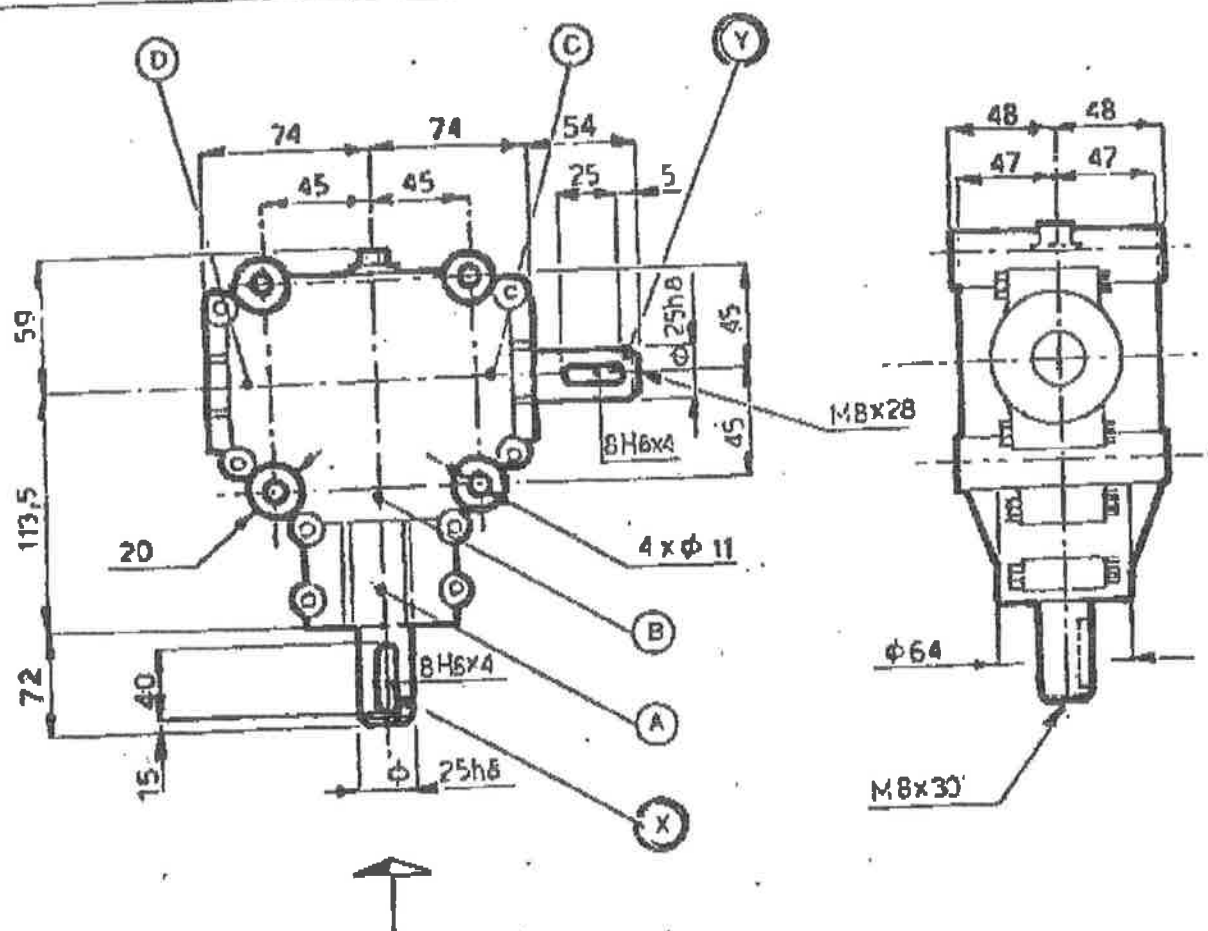

RIDUTTORE

Ratio		Rated input		Rated input power		Rated output torque	Weight	Oil	Grease						
		r.p.m.		HP	kW	da Nm	Kg	Type	Quantity Kg						
19:1		540		9,5	7	22,5	4,1	SAE.90EP	0,32						
Bevel couplings							Cylindrical couplings			Bearings					
Helicoidal	Straight	Teeth number				Module	Helicoidal	Straight	Teeth number				Module	A	6205
		Z ₁	Z ₂	Z ₃	Z ₄	m			Z ₁	Z ₂	Z ₃	Z ₄	m		
	*	10	19			4,5								C	6205
														D	6205
														E	
														F	
Components material														G	
Casing		Shaft x		Shaft y		Bevel gear		Spur gear						H	
SGALSI 2/60 5076		16CrNi4 UNI 5331		C 40 UNI 5332		16CrNi4 UNI 5331									
Tel. 0522/973249 - Telex 530252 COMEX I															



COMPANY

DATE


CODE No

124.019.206

DESIGNATION

L-25A

29.4.86

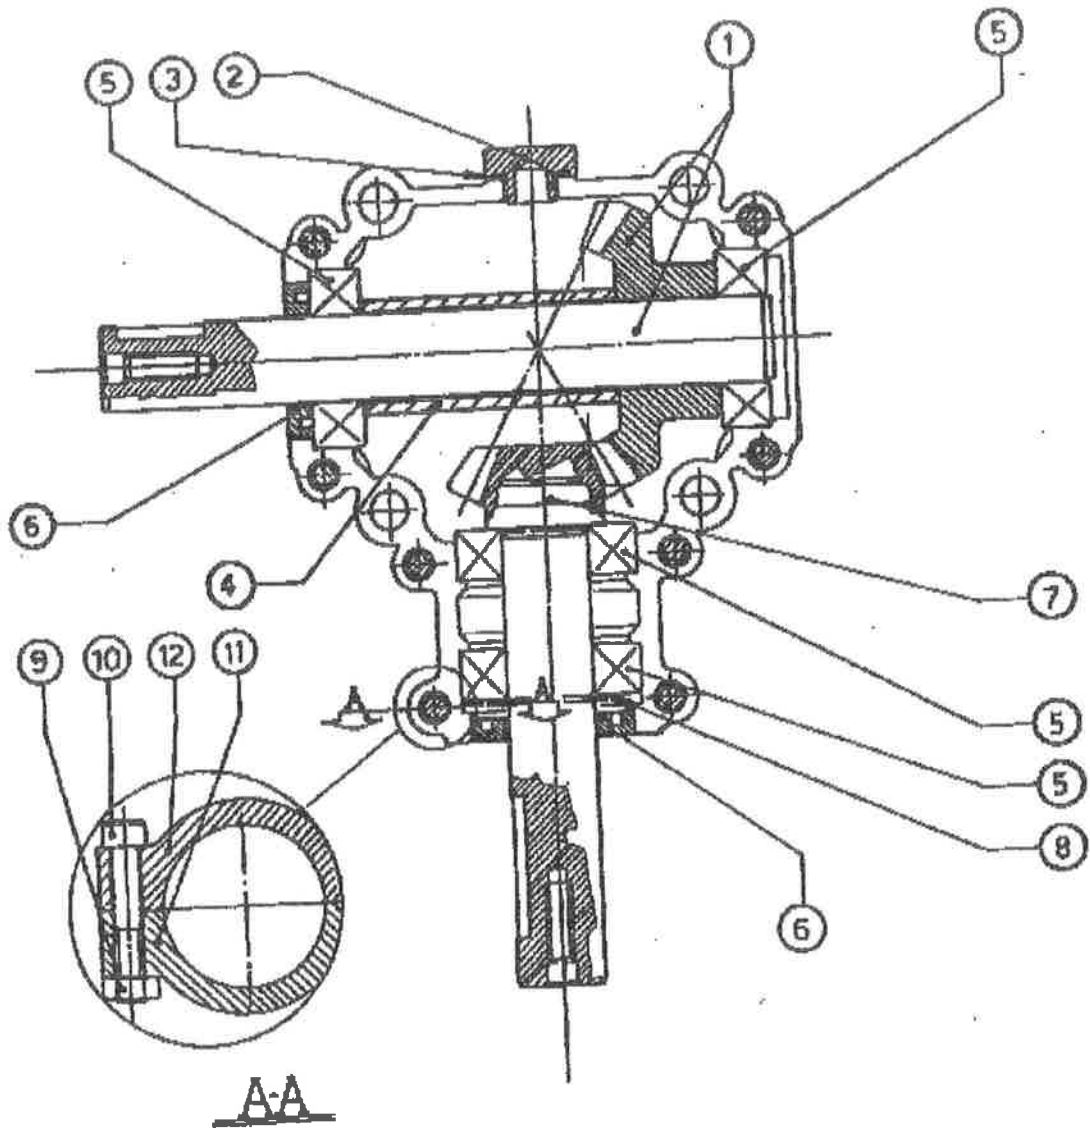

DESIGNATION GEAR BOX L-25A			CODE No	9.124.019.20
POS.	DRG. N.	PIEC	DESCRIPTION	
1	2.124.6020.00	1	SHAFT (ipou)	
2	0.124.7102.00	1	PLUG 3/8" GAS	
3	8.7.6.00191	1	O-RING OR-3062	
4	0.124.7115.00	1	SPACER	
5	8.0.1.00598	4	BEARING 6205	
6	8.7.3.00257	2	OIL SEAL 25X47X7	
7	0.124.5000.00	1	PINION SHAFT Z10 M4.5	
8	8.5.1.00004	1	SNAP RING 25 UNI7435	
9	8.2.1.00382	8	HEX. NUT M8 8	
10	8.1.2.00248	8	BOLT M8X45 8,8	
11	1.124.0300.00	1	CASING	
12	1.124.0301.00	1	CASING	